



PUMP & FILTRATION SYSTEMS ›



# Industrial Gear Pumps





# Industrial Gear Pumps

Gear pumps transport a wide variety of media in industrial production processes in general, in the chemical industry as well as in the pharmaceutical and food industries. The suitable gear pumps and pump systems can be found in MAAG's wide range of products by plant manufacturers and producers and processors of plastics.

The range of requirements in terms of viscosity, pressure, temperature and corrosivity of the media being conveyed is very wide in the industrial sector.

Our portfolio of industrial gear pumps has exactly the required application depth and, thanks to a sophisticated modular system we can even meet the most difficult requirements reliably.


Thanks to our wide know-how in applications and our very own production, we can optimally design and manufacture the pump tailored to your process.

## About us

» MAAG Group is a global and broadly diversified solutions provider with integrated and customizable pump, filtration, pelletizing, pulverizing, and recycling systems in process technology for the polymer, chemical, petrochemical, pharmaceutical and food processing industries. MAAG Group offers customers maximum added value—in understanding the processes involved, with international engineering teams for high-performance solutions, and with a global service network. «

# Applications for highly specific media

## Carbon Fibres




MAAG pumps typically serve as Dope feed/transfer pumps in processing the carbon fibres. Considering the Polyacrylonitrile (PAN) in DMAc Solution, with about 20% of PAN in 80% solvent like DMAc (Dimethylacetamide) or DMSO (Dimethylsulfoxide), also consisting other components and small amounts of water, the mixture has to be pumped through a tiny injector into a chamber where the solvent evaporates and a solid fibre is left out. For this purpose, MAAG pumps are designed to convey and dose the solution with high efficiency.

## Spandex



For this application, MAAG pumps are used as spinning or dosing pumps. Spandex or elastane is a synthetic stretchy chemical fibre known for its exceptional elasticity. It exhibits properties similar to rubber, but is more solid and significantly more durable. Possessing viscosity of up to 1,000,000 mPas, the entire process requires a short dwelling time and is carried out under nitrogen (N<sub>2</sub>) because the medium reacts to oxygen. MAAG pumps, with their special inlet and seal design, fulfills the necessary requirements of all stages.

## Gum Base



Processing of Gum bases (Elastomers, Resins, Waxes, Fats, Emulsifiers, Fillers and Antioxidants) involves several stages such as melting of gum base, mixing with additives and rolling of finished gum. Here, MAAG pumps typically serve, as transfer pumps or as booster pumps in each stage.

## Vinyl Alcohol



The production of Ethylene vinyl alcohol copolymer (EVOH) is a two-step process of polymerization and saponification. Ethylene and vinyl acetate are polymerized using an initiator/activator complex. MAAG pumps serve as a transfer pumps for all stages in the process.

## Hot Melt - Resin



For Hot melt adhesives used primarily for packaging, textiles, labels, tapes, pressure sensitive applications and other disposable products like stamps, MAAG provides metering/transfer/loading pumps or Booster pumps; for instance, in front of a spray nozzle.

## Lubrication and refinery products



MAAG offers customized solutions for simple applications such as grease lubrication, liquid oil, atomized oil (oil mist) or in demanding applications for refinery products like hydrocarbons, unrefined petroleum also in presence of hard particles with special bearings, special sealing designs and materials.

## Molten Sulfur



Its production is ever increasing in refineries, natural gas plants, sulphuric acid plants, chemical production such as rubber additives or even in food products. It is also rapidly reaching new industries. Hence, safe handling of molten sulfur and the associated hydrogen sulfide emissions is becoming critical. MAAG pumps usually aid as High Temperature transfer pumps for such precarious applications.

## Flavours & Fragrances



Usually a mixture of raw products (fruits, herbs, etc.) and a base solvent (alcohol, acids, etc.). When it comes to manufacturing aromas, it's all about the highly accurate dosing of low-viscosity scent and aroma components. MAAG pumps serve as low viscous distillate removal and corrosive residue removal pumps or serve as dosing pumps to accurately dose flavor additives into perfume.

## Food & Pharma



MAAG can offer food-compliant pump executions with stainless steel housings/shafts, ceramic bearings and FDA certified sealings. With their good priming capability, MAAG pumps are well suitable in the pharmaceutical process where the temperatures vary widely, media have low viscosity and accuracy of flow rates is extremely important.



# Our promise to you

## Technology

MAAG is known worldwide as a pioneer and technology leader in the development and manufacturing of gear pump systems and solutions.

MAAG has always focused on keeping its technology up-to-date and tailor it to meet the needs of individual customers. We promise to go beyond your expectations in this regard.

## Innovation

The result of our values and aspiration for customer satisfaction made our industrial pumps come alive. We are confident that the new optimized design, materials used, opens new doors in the application ranges. We promise that this innovation takes the flexibility and maintenance to the next level and ease the efforts put in by the customer in a pump's lifetime.


## Quality

Our customer satisfaction has been our top-most priority. Hence, we dedicate a major part of our resources in maintaining and enhancing the quality time-to-time. We promise better standards of quality with our innovations.


## Applications at site

MAAG industrial gear pumps are used in various phases in production or media transfer. Gear pumps convey the media from one production phase to the next and therefore are required to work continuously and with reliability. They need to withstand high pressures, high temperatures and highly corrosive materials but at the same time with the highest possible safety for operation.


Unloading from truck to storage silos for various product range



Extraction from the container baths to the purifiers

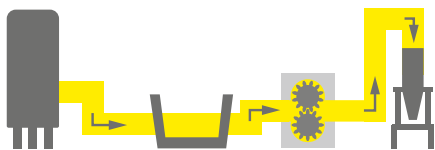

Loading the storage silos from different phases of production



Unloading from the marine tankers to the process areas








## Our pump benefits

- Low shear
- Low NPSHr
- Corrosion resistance
- Extensive portfolio of seals
- In-house manufacturing of all core components
- Easy maintenance and replacement of internal parts
- Reliability and long life
- Precise displacement volume
- Energy efficient
- Dosing accuracy
- Less pulsation during pumping phase
- Wider range of temperature, pressure and viscosity

# Our portfolio at a glance

Gear pumps made by MAAG – a sturdy and reliable solution.

Pump	NEW		cinox/ therminox	cinox V/ therminox V	refinex/ refitherm
	dosix™	flexinox™			
<b>High Chemical Resistance</b>					
<b>Example media</b>					
<b>🧪 Chemicals</b>					
Acids	●	●	●		
Solvents	●	●	●		
Additives	●	●	●		
Watery media, cooling media, Detergents	●	●	●		
Paints varnishes	●	●	●		●
Flavours and fragrances	●	●	●		
Molten sulfur	●	●	●		
General	●	●	●		
<b>🔪 Resin</b>					
Polyurethane, Isocyanate		●	●		
Polyurethane, Polyol					●
Adhesives, Hotmelt		●		●	●
Epoxy Resin		●	●	●	●
General		●	●	●	●
<b>🧴 Plastics</b>					
Spandex				●	
Carbon Fibres precursor		●	●		
Prepolymers, oligomers and monomers				●	
Cellulose derivatives and pulps		●	●		
PVA / EVOH		●	●		
General		●	●	●	
<b>🏭 Refinery products &amp; Lubrication</b>					
Petrochemical products					●
Fuels					●
Bitumen, asphalt					●
Waxes and paraffins					●
Lube oil					
Mineral oils and fats					●
Silicons					●
General					●
<b>🍷 Food &amp; Pharma</b>					
Food	●	●	●		
Pharmaceutical products	●	●	●		
Gum base		●	●	●	
General	●	●	●		

Application/Media:  Chemicals  Resin  Plastics  Food & Pharma  Refinery products & Lubrication

## dosix™ and flexinox™



Corrosion-resistant gear pumps and dosing pumps for chemical processes

## cinox®-V and therminox®-V



Stainless steel discharge pumps for chemical processes

## cinox® and therminox®



Corrosion-resistant gear pumps for chemical processes

## refinex® and refitherm®



Cast steel gear pumps for refinery and petrochemical processes

## hydrolub®



Grey cast iron gear pumps for industrial processes

hydrolub

Low

•

•

•

•

•

•

•

•

•



## dosix™

### Corrosion-resistant dosing pumps for chemical processes



MAAG dosing gear pumps are corrosion-resistant and electrically heatable conveying units, especially designated for the small throughputs; their three-piece configuration facilitates maintenance and replacement of internal parts, such as gears and bearings. Thanks to the wide range of components and materials available, dosix™ pumps can be configured to suit customers specific requirements and therefore, are far superior to standard pumps in terms of performance and reliability.

#### Your benefits


- Wide viscosity, temperature and pressure range
- High efficiencies due to tolerances being modified in line with applications
- Precise displacement volume
- Low pulsation
- Corrosion-resistance
- Reliability and longevity
- Safety
- Easy replacement of internal parts
- Suitable for step-motors

Optimal for those media:





## dosix™ 14-20 flow rate @ 0 bar ΔP

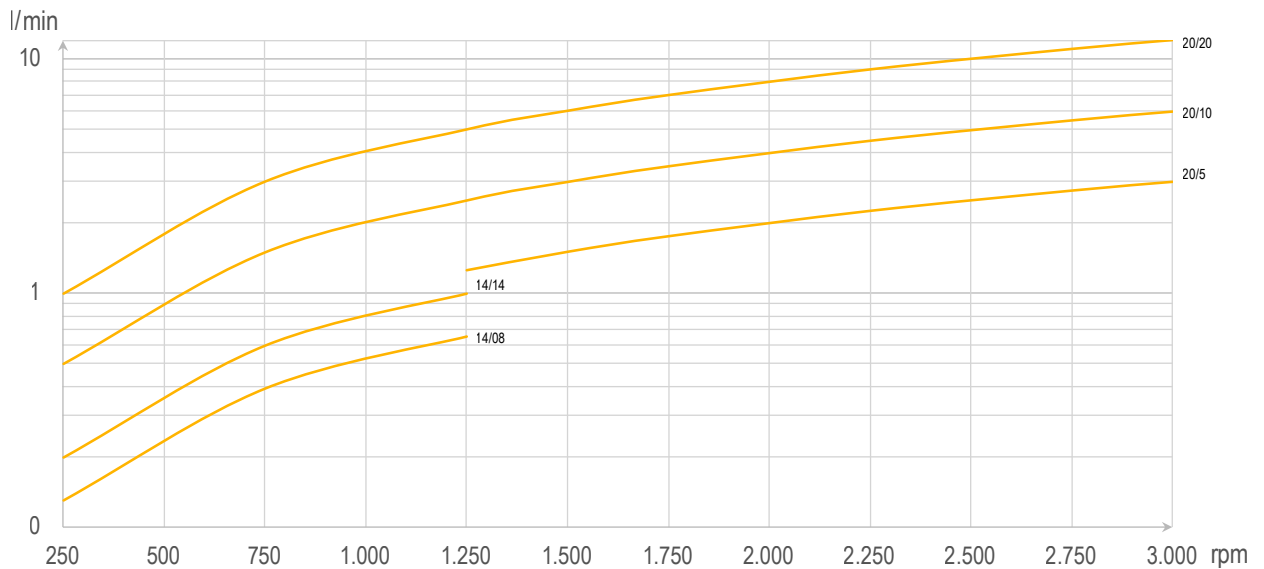

### Application limits:

<b>Viscosity:</b>	0.3 to 500,000 mPas
<b>Temperature:</b>	-30 to 320 °C
<b>Suction pressure<sup>1)</sup>:</b>	Vacuum up to 25 bar
<b>Discharge pressure:</b>	Vacuum up to 100 bar
<b>Flow rate<sup>2)</sup>:</b>	From 0.05 to 12 l/min

### Technical specifications:

<b>Housing:</b>	▪ Stainless steel
	▪ Hastelloy



<b>Gear shafts:</b>	▪ Stainless steel
	▪ Ferralium
	▪ Hastelloy
	▪ Ceramics
	▪ Technopolymer (upon request)
	▪ Titanium (upon request)



<b>Bearing<sup>3)</sup>:</b>	▪ Zirconium Oxide ZrO <sub>2</sub>
	▪ Synthetic carbon
	▪ Ceramic SiC
	▪ Tegodyn NiAg
	▪ Manganese Bronze



<b>Shaft seal:</b>	▪ Single or double mechanical seal
	▪ Lip seal and packing seal
	▪ Magnetic coupling with single or double containment shell



<b>Connections:</b>	▪ Electrical heating by cartridges on request
---------------------	---

### A range of typical pumping media

- Organic and inorganic chemicals
- Solvents
- Acids and alkalis
- Additives
- Cosmetic products
- Pharmaceutical products
- Food extracts and flavourings

### Accessories

- Stands, motor flanges and base plates
- Product flange connections
- Couplings
- Motors and gear reducers
- Frequency converters

### Certificates<sup>4)</sup>

- ATEX certificate
- 3.1 certificate
- Performance test certificates

### Options

- Bi-directional operation
- Special modifications for demanding applications
- Customizable

<sup>1)</sup> With special mag drive up to 100 bar.

<sup>2)</sup> Under development; smaller pumps with flow rate down to 0.02 l/min.

<sup>3)</sup> Other materials and designs available.

<sup>4)</sup> Other certificates and conformities upon request.



## flexinox™

### Corrosion-resistant gear pumps for chemical processes



MAAG flexinox™ pumps are corrosion-resistant conveying units; they satisfy the stringent quality requirements of today's chemical processing industry and their three-piece configuration facilitates maintenance and replacement of internal parts, such as gears and bearings. They can be heated either electrically or with fluid. Thanks to the extensive range of components and materials available, MAAG gear pumps can be configured to suit customers specific requirements and therefore, are far superior to standard pumps in terms of performance and reliability.


#### Your benefits

- Wide viscosity, temperature and pressure range
- High efficiencies due to tolerances being modified in line with applications
- Precise displacement volume
- Self-priming
- Corrosion-resistance
- Reliability and longevity
- Safety
- Easy replacement of internal parts

Optimal for those media:



## flexinox™ 22-45 flow rate @ 0 bar ΔP

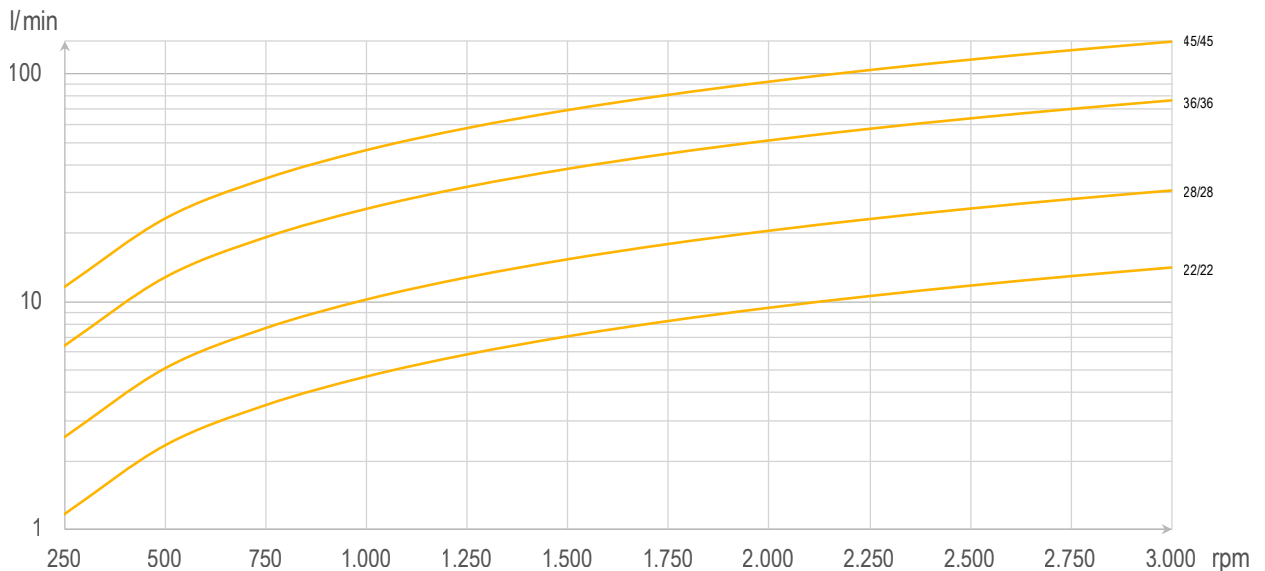

### Application limits:

<b>Viscosity:</b>	0.3 to 500,000 mPas
<b>Temperature:</b>	-30 to 320 °C
<b>Suction pressure:</b>	Vacuum up to 65 bar
<b>Discharge pressure:</b>	Vacuum up to 150 bar
<b>Flow rate:</b>	From 1.2 to 139 l/min

### Technical specifications:

<b>Housing:</b>	▪ Stainless steel
	▪ Hastelloy



<b>Gear shafts:</b>	▪ Stainless steel
	▪ Ferralium
	▪ Hastelloy
	▪ Ceramics
	▪ Technopolymer (upon request)
	▪ Titanium (upon request)



<b>Bearing<sup>1)</sup>:</b>	▪ Synthetic carbon
	▪ Stainless steel with carbon inserts
	▪ Ceramic SiC, ZrO <sub>2</sub>
	▪ Tegodyn NiAg
	▪ Bronze CuAl
	▪ Hardened tool steel



<b>Shaft seal:</b>	▪ Single or double mechanical seal
	▪ Single or double mechanical balanced seal
	▪ Lip seal and packing seal
	▪ Sealing ring in a wide range of materials
	▪ Sealing medium or heating medium connections available
	▪ Magnetic coupling with single or double containment shell



<b>Connections:</b>	▪ SAE, CETOP, DIN and ANSI flanges
---------------------	------------------------------------

<b>Heating:</b>	▪ Electrical heating by cartridges on request
	▪ Integrated channels for heating/cooling by steam or liquid

### A range of typical pumping media

- Organic and inorganic chemicals
- Solvents
- Acids and alkalis
- Emulsions
- Sludges and condensates
- Prepolymers, oligomers, and monomers (PAN)
- Additives
- Resins
- Cellulose derivatives and pulps
- Silicones
- Waxes and paraffins
- Cosmetic products
- Pharmaceutical products
- Food extracts and flavourings
- Gum base
- Vegetable/animal oils and fats
- Molten Sulfur

### Accessories

- Stands, motor flanges and base plates
- Product flange connections
- Couplings
- Motors and gear reducers
- Frequency converters
- Shaft seal systems (with buffer tanks)

### Certificates<sup>2)</sup>

- ATEX certificate
- 3.1 certificate
- Performance test certificates

### Options

- Bi-directional operation
- Special modifications for demanding applications
- Customizable

<sup>1)</sup> Other materials and designs available.

<sup>2)</sup> Other certificates and conformities upon request.



## cinox® therminox®

Corrosion-resistant gear pumps  
for chemical processes



cinox® and therminox® gear pumps are corrosion resistant and heatable stainless steel conveying units that satisfy the stringent quality requirements of today's chemical processing industry. Whether the applications involve highly pure, corrosive, viscous or very hot media, MAAG pump systems hold the solution to meet every pumping challenge. cinox® and therminox® are especially suitable for medium-high flow rates.


### Your benefits

- Wide viscosity, temperature and pressure range
- High efficiencies due to tolerances being modified in line with applications
- Precise displacement volume
- Self-priming
- Corrosion-resistance
- Reliability and longevity
- Safety

Optimal for those media:



## cinox® therminox® 22-180 flow rate @ 0 bar ΔP

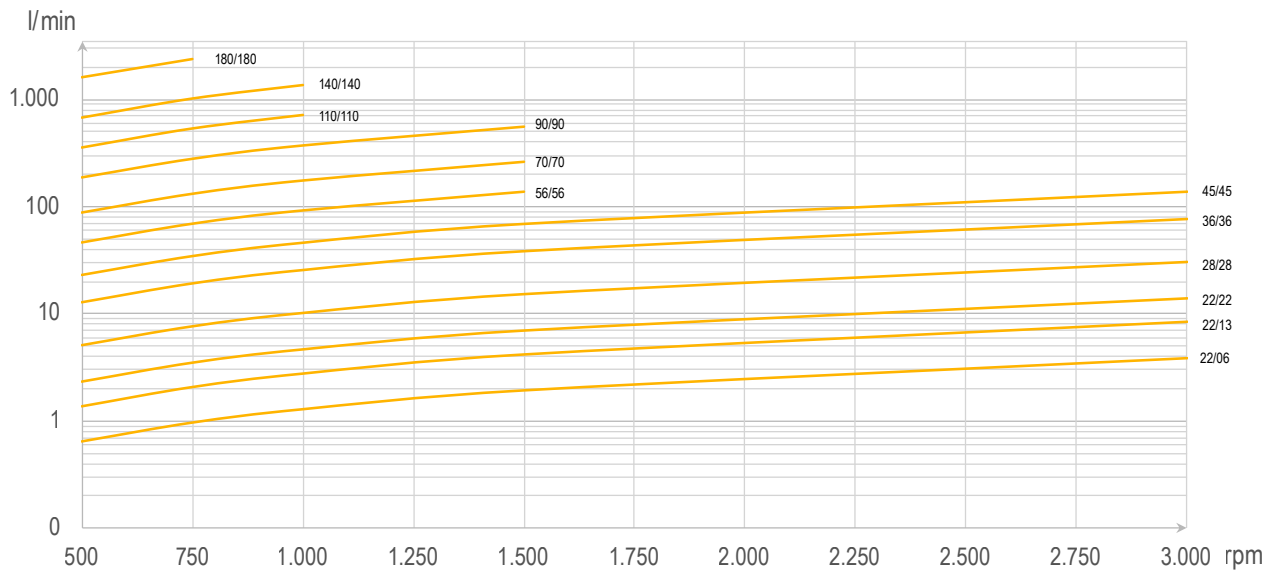

### Application limits:

<b>Viscosity:</b>	0.3 to 4,000,000 mPas
<b>Temperature:</b>	-30 to 320 °C
<b>Suction pressure:</b>	Vacuum up to 65 bar
<b>Discharge pressure:</b>	Vacuum up to 200 bar
<b>Flow rate<sup>1)</sup>:</b>	0.1 to 2,400 l/min

### Technical specifications:

<b>Housing:</b>	▪ Stainless steel
	▪ Hastelloy



<b>Gear shafts:</b>	▪ Stainless steel
	▪ Ferralium
	▪ Hastelloy
	▪ Ceramic SSiC
	▪ Technopolymer (upon request)



<b>Bearing<sup>2)</sup>:</b>	▪ Synthetic carbon
	▪ Stainless steel with carbon inserts
	▪ Ceramic SSiC, ZrO <sub>2</sub>
	▪ Tegodyn NiAg
	▪ Bronze CuAl
	▪ Hardened tool steel



<b>Shaft seal:</b>	▪ Single or double mechanical seal
	▪ Single or double mechanical balanced seal
	▪ Lip seal and packing seal
	▪ Sealing ring in a wide range of materials
	▪ Sealing medium or heating medium connections available
	▪ Magnetic coupling with single or double containment shell



<b>Connections:</b>	▪ SAE, CETOP, DIN and ANSI flanges
---------------------	------------------------------------

<b>Heating:</b>	▪ Electrical heating by cartridges optional for cinox®
	▪ Integrated channels for heating/cooling by steam or liquids for therminox®

### A range of typical pumping media

- Organic and inorganic chemicals
- Solvents
- Acids and alkalis
- Emulsions
- Sludges and condensates
- Prepolymers, oligomers, and monomers (PAN)
- Additives
- Resins
- Cellulose derivatives and pulps
- Silicones
- Waxes and paraffins
- Cosmetic products
- Pharmaceutical products
- Food extracts and flavourings
- Gum base
- Vegetable/animal oils and fats
- Molten Sulfur

### Accessories

- Stands, motor flanges and base plates
- Product flange connections
- Couplings
- Motors and gear reducers
- Frequency converters
- Shaft seal systems (with buffer tanks)

### Certificates<sup>3)</sup>

- ATEX certificate
- 3.1 certificate
- German Air Quality certificate (TA-Luft)
- Performance test certificates


### Options

- Heated seals
- Bi-directional operation
- Special modifications for demanding applications

<sup>1)</sup> Higher flow rates upon request.

<sup>2)</sup> Other materials and designs available.

<sup>3)</sup> Other certificates and conformities upon request.

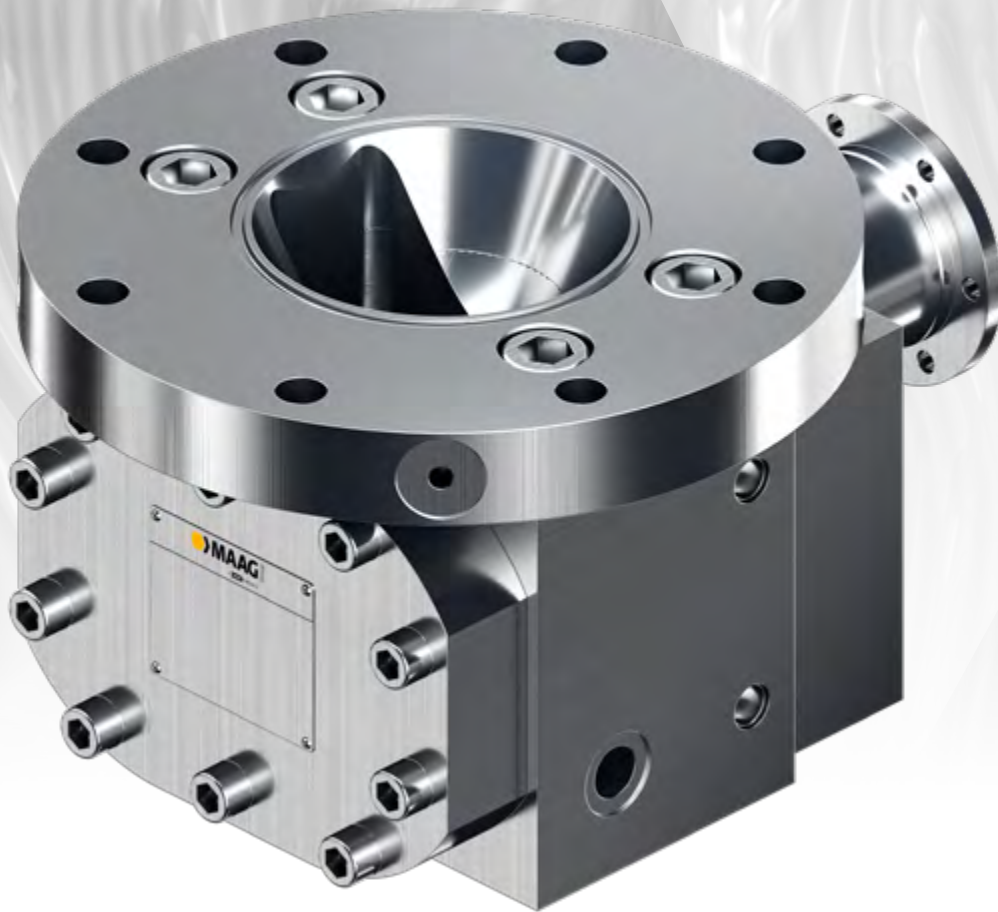

## cinox<sup>®</sup>-V therminox<sup>®</sup>-V

Stainless steel discharge pumps for chemical processes



The pump models cinox<sup>®</sup>-V therminox<sup>®</sup>-V are discharge pumps. They have been designed for highly viscous fluids, which are gently extracted from reactors and degassing devices even when the inlet pressure is low, ensuring optimum filling characteristics and short dwell times. This new pump series combines the outstanding flow characteristics of the polymer pumps with the exacting requirements of the chemical industry.


### Your benefits

- Optimum fill characteristics due to enlarged inlet and optimum inlet geometry
- Low pulsation
- High efficiencies thanks to application-specific clearances
- Reliability
- Longevity
- Safety

Optimal for those media:



**cinox®-V therminox®-V 28-70 flow rate @ 0 bar ΔP**

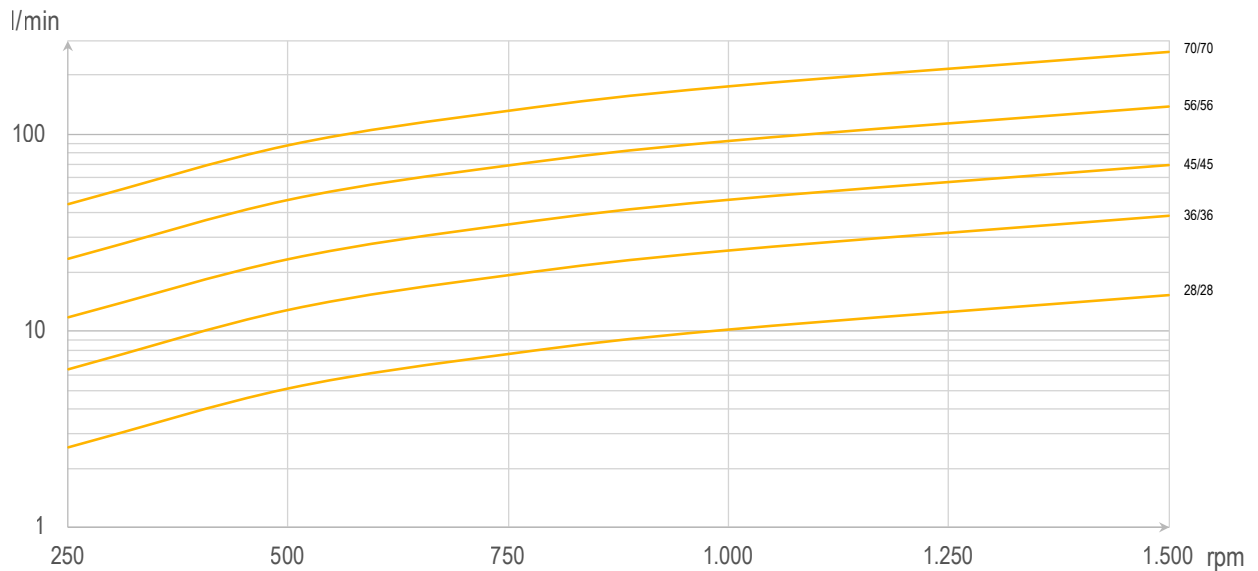

**Application limits:**

<b>Viscosity:</b>	0.3 to 4,000,000 mPas
<b>Temperature:</b>	-30 to 320 °C
<b>Suction pressure:</b>	Vacuum up to 16 bar
<b>Discharge pressure:</b>	Vacuum up to 200 bar
<b>Flow rate<sup>1)</sup>:</b>	2.5 to 265 l/min

**Technical specifications:**

**Housing:** ■ Stainless steel



**Gear shafts<sup>2)</sup>:** ■ Stainless steel



**Bearing<sup>2)</sup>:** ■ Hardened tool steel



**Shaft seal:**

- Double mechanical seal
- Interlock or heater connections available
- Seal ring from a range of materials
- Packing gland throttled (optional spring loaded)



**Connections:** ■ Flanges (other optional) ANSI, DIN

**Enlarged inlet:** ■ Enlarged inlet geometry for low NPSH at high viscosities

**A range of typical pumping media**

- Prepolymers, oligomers, and monomers
- Dopes
- Spandex
- Resins
- Adhesives
- Silicones
- Waxes and paraffins
- Emulsifying agents
- Gum base

**Accessories**

- Product connecting flanges
- Motors and gear reducers
- Universal cardan shafts, hubs
- Frequency converters
- Sealing liquid system

**Certificates<sup>3)</sup>**

- ATEX certificate
- 3.1 certificate
- German Air Quality certificate (TA-Luft)
- Performance test certificates

**Options**

- Electrical heating
- Heated product flanges

<sup>1)</sup> Higher flow rates upon request.

<sup>2)</sup> Other materials and designs available.

<sup>3)</sup> Other certificates and conformities upon request.



## refinex<sup>®</sup> refitherm<sup>®</sup>

Cast steel gear pumps for refineries  
and petrochemical processes



Refinery and industrial plant applications are challenging. High process pressures and high temperatures are commonplace in such environments. Precisely in these environments MAAG gear pumps develop their full potential. Thanks to the extensive range of components and materials of constructions to choose from, MAAG gear pumps can be configured to suit customers specific requirements and therefore, are far superior to standard pumps in terms of performance and reliability.


### Your benefits

- Wide viscosity, temperature, and pressure range
- High efficiencies (due to tolerances and small clearances being modified in line with applications)
- Precise displacement volume
- Self-priming
- Reliability and longevity
- Suitable for API 676

Optimal for those media:





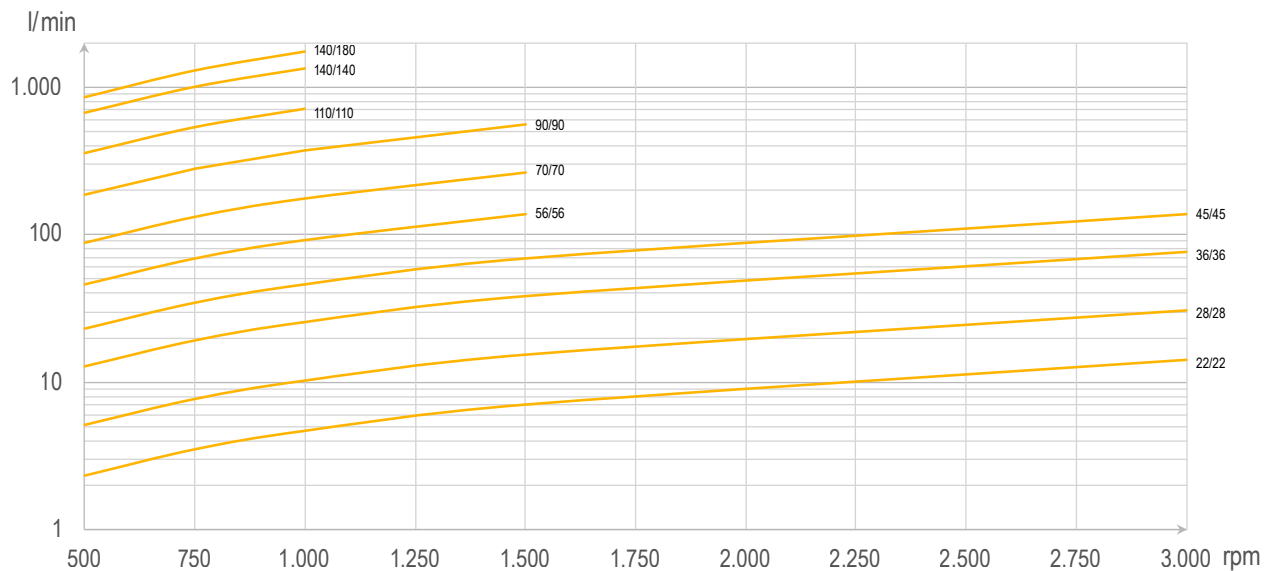

**Application limits:**

<b>Viscosity:</b>	0.3 to 4,000,000 mPas
<b>Temperature:</b>	-30 to 320 °C
<b>Suction pressure:</b>	Vacuum to 100 bar
<b>Discharge pressure:</b>	Vacuum to 300 bar
<b>Flow rate<sup>1)</sup>:</b>	0.5 to 1,750 l/min

**Technical specifications:**

**Housing:** ■ Cast steel



**Gear shafts:** ■ Stainless steel  
 ■ Nitrided steel (spur and helical)  
 ■ Nitrided steel coated



**Bearing<sup>2)</sup>:** ■ Manganese bronze  
 ■ Sintered iron  
 ■ Synthetic carbon  
 ■ Steel with carbon inserts  
 ■ Nitrided steel  
 ■ Nitrided steel coated  
 ■ Hardened tool steel  
 ■ Bronze – CuAl



**Shaft seal:** ■ Lip seals and packing  
 ■ Single or double mechanical seal  
 ■ External mechanical seal  
 ■ Sealing medium or heating medium connections available  
 ■ Magnetic coupling with single or double containment shell



**Connections:** ■ SAE, CETOP, DIN, and ANSI flanges

**Heating:** ■ Electrical heating by cartridges optional for refinex®  
 ■ Integrated channels for heating / cooling by means of steam or liquids for refitherm®

**A range of typical pumping media**

- Emulsions
- Sludges and condensates
- Additives
- Resins
- Cellulose derivatives and pulps
- Silicones
- Adhesives and hot-melt adhesives
- Paints and varnishes
- Waxes and paraffins
- Fertilizers
- Mineral oils and fats
- Fuels
- Petrochemical products

**Certificates<sup>3)</sup>**

- ATEX certificate
- 3.1 certificate
- German Air Quality certificate (TA-Luft)
- Performance test certificates

**Options**

- Electrical heating
- Heated seals
- Bi-directional operation
- Special modifications for demanding applications

<sup>1)</sup> Higher flow rates upon request.

<sup>2)</sup> Other materials and designs available.

<sup>3)</sup> Other certificates and conformities upon request.



## hydrolub®

Grey cast iron gear pumps  
for industrial processes




Continuously operated equipment calls for reliable components. Whether in lubrication oil applications or in processing plants, a pump is required to work reliably and long-lasting. Thanks to the extensive range of components and pump sizes, hydrolub® can be configured to suit customers' specific requirements and therefore, are far superior to standard pumps in terms of performance.

### Your benefits

- High efficiencies (due to tolerances and small clearances being modified in line with applications)
- Precise displacement volume
- Self-priming
- Reliability and longevity
- Safety
- Low pulsations for oil applications (helical gears)

Optimal for those media:



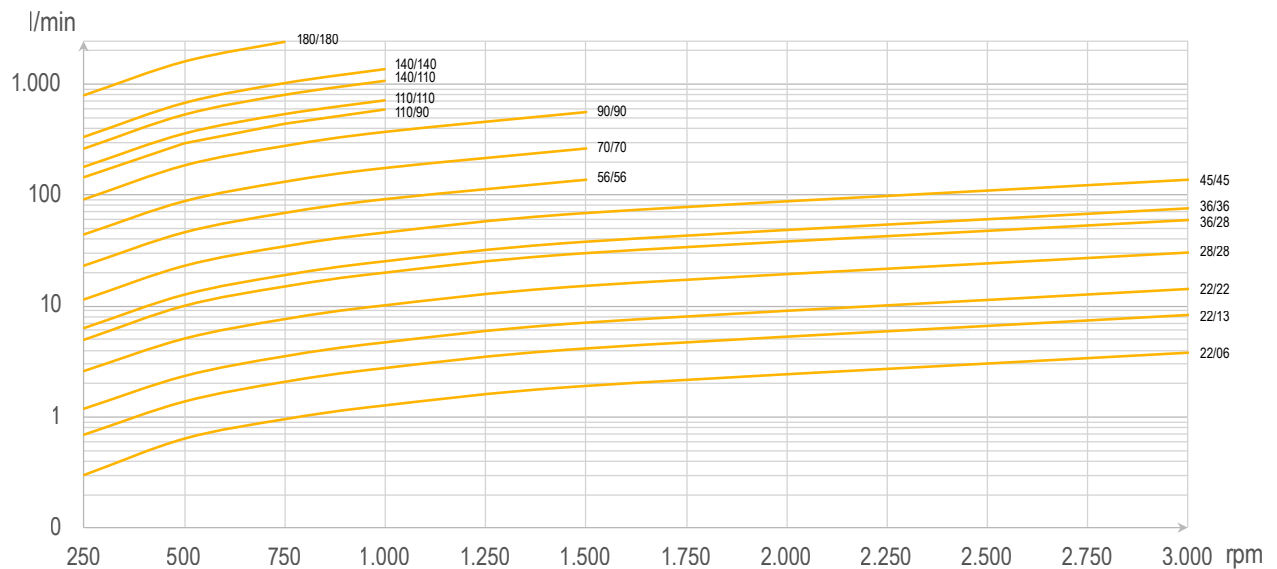

**Application limits:**

<b>Viscosity:</b>	0.3 to 4,000,000 mPas
<b>Temperature:</b>	-30 to 150 °C
<b>Suction pressure:</b>	Vacuum to 65 bar
<b>Discharge pressure:</b>	Vacuum to 120 bar
<b>Flow rate:</b>	0.1 to 2,400 l/min

**A range of typical pumping media**

- Silicones
- Paints and varnishes
- Waxes and paraffins
- Mineral oils and fats
- Fuels
- Petrochemical products
- Lube oil

**Technical specifications:**

**Housing:** ■ Pressure-resistant cast iron



**Gear shafts:** ■ Nitrided steel (spur, helical or coated)



**Bearing<sup>2)</sup>:**

- Manganese bronze
- Sintered iron
- Synthetic carbon
- Steel with carbon inserts
- Nitrided steel
- Nitrided steel coated
- Hardened tool steel
- Bronze – CuAl



**Shaft seal:**

- Lip seals and packing
- Single or double mechanical seal
- External mechanical seal
- Sealing medium or heating medium connections available
- Magnetic coupling with single or double containment shell



**Connections:** ■ SAE, CETOP, DIN, and ANSI flanges

**Accessories**

- Stands, motor flanges and base plates
- Product connecting flanges
- Couplings
- Motors and gear reducers
- Frequency converters
- Shaft seal systems

**Certificates<sup>3)</sup>**

- ATEX certificates
- 3.1 certificate
- German Air Quality certificate (TA-Luft)
- Performance test certificates


**Options**

- Heated seals
- Bi-directional rotation
- Special modifications for demanding applications
- Safety valve in the pump upon request

<sup>1)</sup> Other pump sizes and higher flow rates available.

<sup>2)</sup> Other materials and designs available.

<sup>3)</sup> Other certificates and conformities upon request.

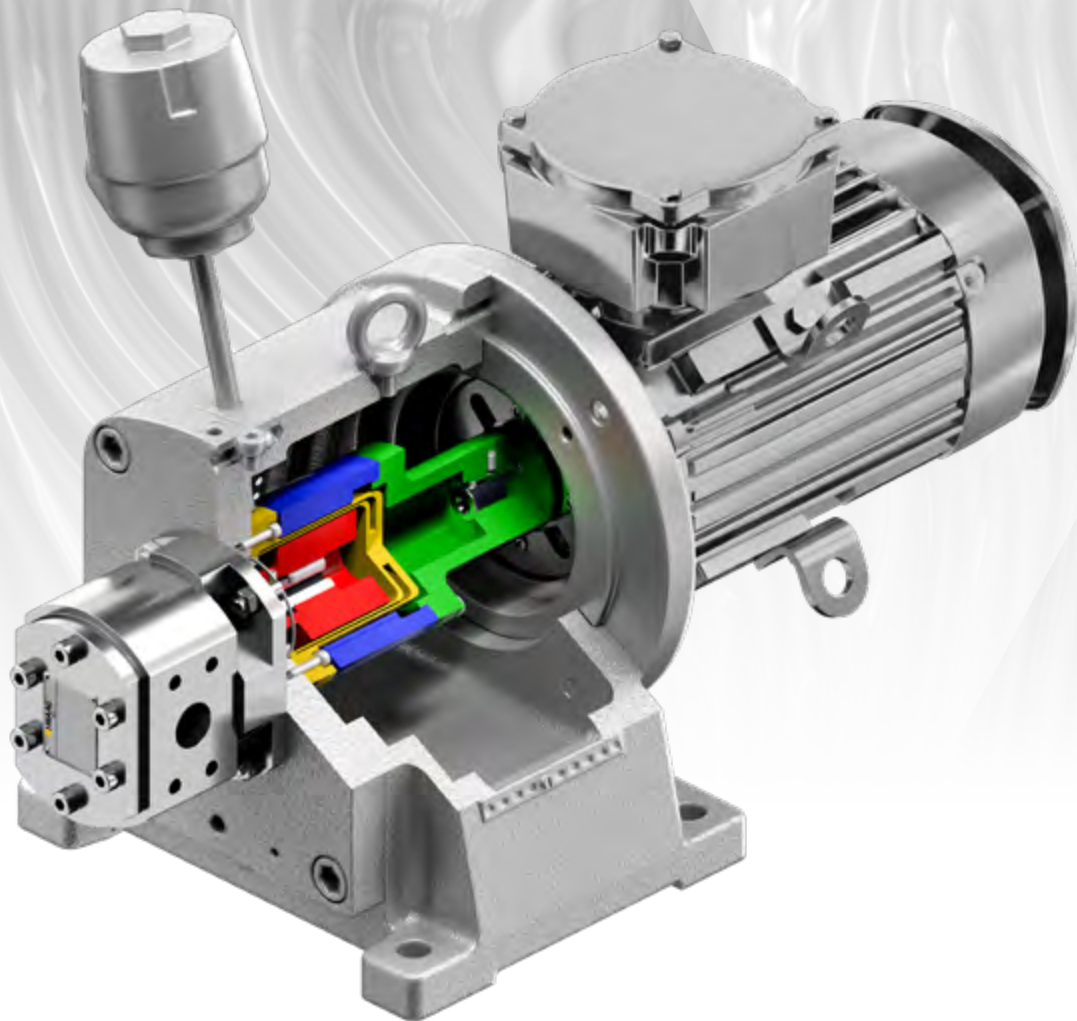

## mag drive

Magnetic coupling for chemical and industrial processes



Magnetic drives are hermetically sealed thereby guaranteeing that environmentally hazardous, poisonous, and malodorous substances are pumped safely.

The product chamber in the gear pump is completely separated from the environment by a containment shell. The torque is transferred from motor shaft to pump shaft without contact by means of heavy-duty permanent magnets. This design makes the magnetic couplings extremely safe and virtually maintenance-free.

### Your benefits

- High suction pressures (standard to 25 bar, in special designs up to 100 bar)
- Hermetically-sealed design
- Optimized safety and leak sealing
- Long service life
- Virtually maintenance-free
- Low maintenance costs

Optimal for those media:



**Application limits:**

<b>Viscosity:</b>	1 to 5,000 mPas
<b>Temperature:</b>	-30 to 300 °C
<b>Suction pressure:</b>	<ul style="list-style-type: none"> <li>■ Vacuum to 25 bar</li> <li>■ Special designs up to 100 bar available</li> </ul>
<b>Discharge pressure:</b>	Vacuum to 100 bar

**Certificates<sup>1)</sup>**

- ATEX certificate
- 3.1 certificate
- Performance test certificates
- German Air certificate (TA-Luft)

**Options**

- Special designs for suction pressures up to 100 bar
- Temperature monitoring on containment shell
- Temperature, pressure or level monitoring of sealing liquid

**Typical pumping media and their characteristics**

- Toxic: hydrochloric acids, benzene, coolants, phenol, molten sulfur
- Malodorous: nitric acid, acids, anhydrides, fats, thermal oils, flavorings
- Volatile: solvents, condensates
- Combustible: solvents, nitrate, explosive substances, blasting oils, nitroglycerin
- Highly pure: pharmaceutical products
- Crystallize on contact with air: isocyanates

**Technical data:**

<b>Magnetic drive Type SMC (with a single containment shell):</b>	SMC 60-07	SMC 60-14	SMC 60-22	SMC 75-30	SMC 110-50	SMC 110-80	SMC 135-135
<b>Transferable torque in Nm:</b>	7	14	22	30	50	80	135
<b>Magnetic drive Type SMCD (with a dual containment shell):</b>	SMCD 60-07	SMCD 60-14	SMCD 60-22	SMCD 75-30	SMCD 75-40	SMCD 110-50	SMCD 135-180
<b>Transferable torque in Nm:</b>	7	14	22	30	40	110	180

Pump size	Theoretical pumping capacities in l/min at 0 bar dp				Motor flange Ø [mm]	Magnetic drive sizes <sup>2)</sup>
	500	750	1,000	1,500		
<b>20/05</b>	0,48	0,72	0,96	1,44	200	SMC 60-07, SMCD 60-07
<b>22/06</b>	0,64	0,96	1,28	1,92	200	SMC 60-07, SMCD 60-07
<b>20/10</b>	0,96	1,44	1,92	2,88	200	SMC 60-07, SMCD 60-07
<b>22/13</b>	1,39	2,09	2,78	4,17	200 250	SMC 60-07, SMCD 60-07 SMC 60-14, SMCD 60-14
<b>20/20</b>	1,92	2,88	3,84	5,76	200	SMC 60-07, SMCD 60-07
<b>22/22</b>	2,35	3,53	4,7	7,05	200 250	SMC 60-07, SMCD 60-07 SMC 60-14, SMCD 60-14
<b>28/28</b>	5,1	7,65	10,2	15,3	250	SMC 60-14, SMC 60-22, SMCD 60-14, SMCD 60-22
<b>36/36</b>	12,8	19,2	25,6	38,4	250 300	SMC 60-22, SMCD 60-22 SMC 75-30, SMC 110-50, SMCD 75-30, SMCD 110-50
<b>45/45</b>	23,2	34,7	46,3	69,5	300 350	SMC 75-30, SMC 110-50, SMCD 75-30, SMCD 110-50 SMC 110-80, SMC 135-135
<b>56/56</b>	46,3	69,5	92,6	138,9	300 350	SMC 75-30, SMC 110-50, SMCD 75-30, SMCD 110-50 SMC 110-80
<b>70/70</b>	88	132	176	264	350	SMC 110-80, SMCD 110-50, SMCD 135-180

<sup>1)</sup> Other certificates and conformities upon request.

<sup>2)</sup> Other sizes upon request.

## Service around the clock. Worldwide.

For MAAG Group, "service" is far more than just supplying spare parts. Contacting and supporting a wide range of customers, from small and specialized ones to large multinational manufacturers, has provided us with expert service knowledge found nowhere else in the industry.

Our experts within our fields of competence support our customers by presenting solutions that fit their unique requirements. We start with the important step of a comprehensive process analysis. Only if all individual components of a system are ideally matched and coordinated, minimized waste, reduced downtimes, improved product quality, optimized production and reduced energy costs can be achieved.

With a very large number of machines and systems installed at over 25,000 customers worldwide, MAAG Group has, over the past decades, built up a high level of expertise in pump technology, filtration, pelletizing, pulverizing, and recycling that is unique in the world. Specialized consulting and process support is an essential part of MAAG Group's current range of products and services and its extensive global network of services.


MAAG Group maintains service centers in Germany, Switzerland, Italy, Malaysia, the USA, Brazil, Taiwan, China, Thailand, and India. With these worldwide locations and their associated proximity to customers, we have earned a reputation for providing prompt, reliable service to our customers – before, during, and after the purchase. In addition, an extensive inventory of wear and spare parts is always available for immediate shipment. Since all spare parts are manufactured to original specifications, our customers can always rely on their design, quality, and reliability to keep their systems running at peak performance.



**MAAG** Group  
A MAAG COMPANY

Learn more about the wide range of services offered by MAAG Group and our strong product brands AUTOMATIK, ETTLINGER, GALA, MAAG, REDUCTION, and SCHEER. We look forward to collaborate with you!

[www.maag.com](http://www.maag.com)  
[welcome@maag.com](mailto:welcome@maag.com)  
T + 41 44 27882-00

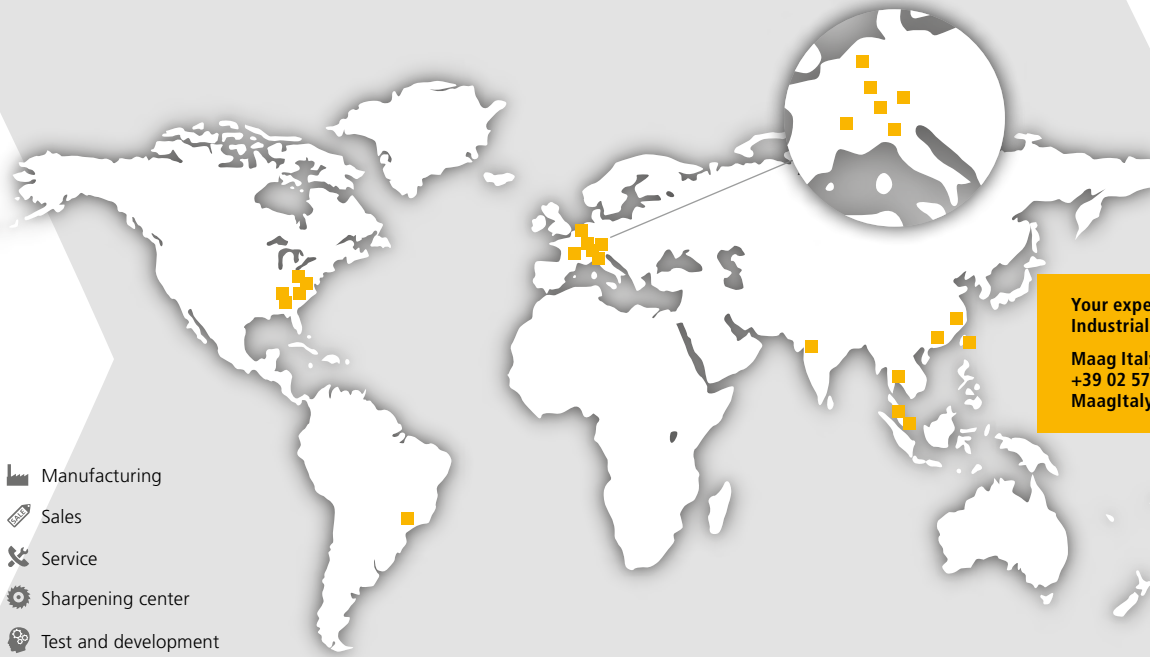

**Your experts for Industrial Gear Pumps**  
**Maag Italy s.r.l.**  
**+39 02 5759321**  
**MaagItaly@maag.com**

- Manufacturing
- Sales
- Service
- Sharpening center
- Test and development

**Europe**

**Headquarters in Switzerland**

Maag Pump Systems AG  
 Oberglatt  
 +41 44 27882-00  
 welcome@maag.com



**Germany**

Maag Automatik GmbH  
 Grossostheim  
 +49 6026 503-0  
 info@maag.com



Gala Kunststoff- und  
 Kautschukmaschinen GmbH  
 Xanten  
 +49 2801 980-0  
 maag.xan.info@maag.com



Maag Automatik GmbH  
 Stuttgart  
 +49 6026 503-442  
 sales@maag.com



Ettlinger  
 Kunststoffmaschinen GmbH  
 Königsbrunn  
 +49 8231 34908-00  
 info.ettlinger@maag.com



**France**

Maag Pump Systems SAS  
 Villeurbanne  
 +33 4 7268673-0  
 MaagFrance@maag.com



**Italy**

Maag Italy s.r.l.  
 Rozzano (MI)  
 +39 02 5759321  
 MaagItaly@maag.com



**Americas**

**Brazil**

Maag Automatik  
 c/o Dover do Brasil  
 Jundiaí – SP  
 +55 11 292366-00  
 InfoBrazil@maag.com



**USA**

Ettlinger North America  
 Atlanta, GA  
 +1 770 703 8541  
 info.ettlinger@maag.com



Maag Automatik, Inc.  
 Charlotte, NC  
 +1 704 7169000  
 MaagAmericas@maag.com



Gala Industries, Inc.  
 Eagle Rock, VA  
 +1 540 8842589  
 gala@gala-industries.com



Maag Automatik Inc.  
 Kent, Ohio  
 +1 330 6772225  
 Maag.KEN.Info@maag.com



**Asia-Pacific**

**Greater China**

Maag-Automatik Plastics  
 Machinery (Shanghai) Co., Ltd.  
 Jiading District, Shanghai,  
 201802  
 +86 21 8033 3200  
 MaagChina@maag.com



Maag China Guangzhou Branch  
 Huangpu District, Guangzhou  
 510730  
 +86 20 8985 0116  
 MaagChina@maag.com



Maag Service (Taiwan) Ltd.  
 Taipei City 106  
 +886 2 2703 6336  
 InfoTaiwan@maag.com



**India**

Maag Automatik  
 c/o Dover India Pvt. Ltd.  
 Vadodara, Gujarat  
 +91 960 175286-4 (-5)  
 MaagIndia@maag.com



**Malaysia**

Automatik Plastics Machinery  
 Petaling Jaya Selangor  
 +6 03 7842 2116  
 InfoSEA@maag.com



**Singapore**

Maag Systems Singapore  
 Singapore 119843  
 +65 6460 0160  
 MaagSingapore@maag.com



**Thailand**

Gala Industries Asia Limited.  
 A. Sriracha, Chonburi  
 +66 38 190840  
 Maag.BKK.Information  
 @maag.com



You can find detailed information about our products in our print media at [www.maag.com/brochures](http://www.maag.com/brochures).



- PUMP & FILTRATION SYSTEMS > MAAG ETTLINGER
- PELLETIZING SYSTEMS > GALA SCHEER AUTOMATIK REDUCTION
- PULVERIZING SYSTEMS > REDUCTION
- RECYCLING SYSTEMS > ETTLINGER



Data and illustrations refer to the date of printing. Changes may be made without special notice. Products and processes of MAAG are protected by patents.